

SPECIALTY WINDOW FILMS

DISTRIBUTOR OF QUALITY WINDOW FILM



A better environment inside and out.™

Solar Gard Solar Window Films

NightSky 10

Performance results


	1/8" (3mm)	1/4" (6mm)	1/8"+1/8" (3mm+3mm)
Solar energy			
% Transmittance	16	15	13
% Absorbance	71	73	70
% Reflectance	13	12	17
Visible light			
% Transmittance	10	9	9
% Reflectance exterior	16	15	21
% Reflectance interior	14	14	14
Emissivity	.87	.87	.87
Winter U-Factor (W/m² °C)	5.99	5.90	2.75
Shading coefficient	.44	.44	.61
Solar heat gain coefficient	.38	.37	.53
Solar selectivity index - luminous efficacy (VLT/SC)	.22	.21	.14
Light to solar heat gain factor (VLT/SHGC)	.25	.25	.16
% Ultraviolet light blocked @ 300 to 380 nm	>98	>98	>98
% Total solar energy rejected	62	63	47
% Summer solar heat gain reduction	56	54	30
% Glare reduction	89	90	89

Physical properties nominal

Gauge	2.0 mil (50 micron)
Tensile strength	30,000 lbs/in ² (2,110 kg/cm ²)

Film performance

Performance results were generated from testing 1/8" (3mm) thick clear glass.

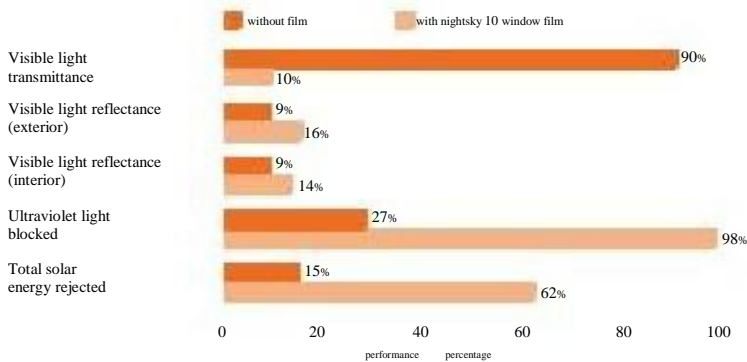

All performance results are based on the film installed on the inside surface of 1/8" (3mm), 1/4" (6mm), and 1/8"+1/8" (3mm+3mm) thick, clear glass

Notes

1. Saint-Gobain is a participating member of AIMCAL (the Association of Industrial Metallizers, Coaters and Laminators), IWFA, and EWFA. Performance results are calculated using NFRC methodology and LBNL Window 5.2 software, and are subject to variations within industry standards and only intended for estimating purposes.
2. These test data contain only results arrived at after employing specific test procedures and standards. The included data do not constitute a recommendation for, endorsement of, or certification of the product or material tested. These data are provided for informational purposes only and are not to be considered part of the basic representation or warranty, expressed or implied, including the implied warranties of merchantability or fitness for a particular purpose, that its products will conform to these test data. Saint-Gobain's limited warranty should be carefully reviewed prior to purchasing any Saint-Gobain product. Extrapolation of data from the sample or samples relation to the batch or lot from which data were obtained may not correlate and should be interpreted accordingly with caution. Saint-Gobain shall not be responsible for variations in quality, composition, appearance, performance, or other feature of similar subject matter produced by persons or under conditions over which Saint-Gobain has no control.
3. Performance results for summer solar heat gain reduction and glare reduction are calculated by comparing filmed glass to that of untreated glazing.

Distributed by:- Specialty Window Films : Unit 3D/89 Ellice Road Glenfield 0629 Auckland : P.O. Box 101167 NSMC
0745 : Tel (09) 441 0040 : Fax (09) 444 2788

www.solargard.co.nz