

# SPECIALTY WINDOW FILMS

DISTRIBUTOR OF QUALITY WINDOW FILM



A better environment inside and out.™

Solar Gard Solar Window Films

## NightSky 20

### Performance results


	1/8" (3mm)	1/4" (6mm)	1/8"+1/8" (3mm+3mm)
<b>Solar energy</b>			
% Transmittance	24	22	20
% Absorbance	65	67	64
% Reflectance	11	11	16
<b>Visible light</b>			
% Transmittance	20	20	18
% Reflectance exterior	13	13	19
% Reflectance interior	12	12	12
<b>Emissivity</b>	.86	.86	.86
<b>Winter U-Factor (W/m<sup>2</sup> °C)</b>	5.96	5.87	2.74
<b>Shading coefficient</b>	.51	.50	.65
<b>Solar heat gain coefficient</b>	.43	.43	.56
<b>Solar selectivity index - luminous efficacy (VLT/SC)</b>	.40	.40	.28
<b>Light to solar heat gain factor (VLT/SHGC)</b>	.46	.46	.33
% Ultraviolet light blocked @ 300 to 380 nm	>97	>97	>97
% Total solar energy rejected	57	57	44
% Summer solar heat gain reduction	49	48	26
% Glare reduction	78	78	78

### Physical properties nominal

Gauge	2.0 mil (50 micron)
Tensile strength	30,000 lbs/in <sup>2</sup> (2,110 kg/cm <sup>2</sup> )

### Film performance

Performance results were generated from testing 1/8" (3mm) thick clear glass.

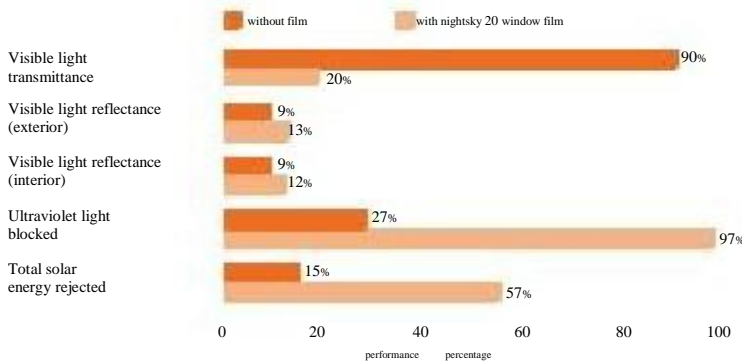

All performance results are based on the film installed on the inside surface of 1/8" (3mm), 1/4" (6mm), and 1/8"+1/8" (3mm+3mm) thick, clear glass

### Notes

1. Saint-Gobain is a participating member of AIMCAL (the Association of Industrial Metallizers, Coaters and Laminators), IWFA, and EWFA. Performance results are calculated using NFRC methodology and LBNL Window 5.2 software, and are subject to variations within industry standards and only intended for estimating purposes.
2. These test data contain only results arrived at after employing specific test procedures and standards. The included data do not constitute a recommendation for, endorsement of, or certification of the product or material tested. These data are provided for informational purposes only and are not to be considered part of the basic representation or warranty, expressed or implied, including the implied warranties of merchantability or fitness for a particular purpose, that its products will conform to these test data. Saint-Gobain's limited warranty should be carefully reviewed prior to purchasing any Saint-Gobain product. Extrapolation of data from the sample or samples relation to the batch or lot from which data were obtained may not correlate and should be interpreted accordingly with caution. Saint-Gobain shall not be responsible for variations in quality, composition, appearance, performance, or other feature of similar subject matter produced by persons or under conditions over which Saint-Gobain has no control.
3. Performance results for summer solar heat gain reduction and glare reduction are calculated by comparing filmed glass to that of untreated glazing.

Distributed by:- Specialty Window Films : Unit 3D/89 Ellice Road Glenfield 0629 Auckland : P.O. Box 101167 NSMC  
0745 : Tel (09) 441 0040 : Fax (09) 444 2788

www.solargard.co.nz