

SPECIALTY WINDOW FILMS

DISTRIBUTOR OF QUALITY WINDOW FILM



A better environment inside and out.™

Solar Gard Solar Window Films

Silver 20

Performance results


	1/8" (3mm)	1/4" (6mm)	1/8"+1/8" (3mm+3mm)
Solar energy			
% Transmittance	12	11	10
% Absorbance	36	44	44
% Reflectance	53	45	46
Visible light			
% Transmittance	16	16	16
% Reflectance exterior	58	56	58
% Reflectance interior	58	58	59
Emissivity	.70	.70	.70
Winter U-Factor (W/m ² °C)	5.51	5.79	2.61
Shading coefficient	.25	.26	.35
Solar heat gain coefficient	.21	.23	.30
Solar selectivity index - luminous efficacy (VLT/SC)	.66	.60	.44
Light to solar heat gain factor (VLT/SHGC)	.77	.70	.51
% Ultraviolet light blocked @ 300 to 380 nm	>99	>99	>99
% Total solar energy rejected	79	77	70
% Summer solar heat gain reduction	75	72	59
% Glare reduction	82	82	81

Physical properties nominal

Gauge	2.0 mil (50 micron)
Tensile strength	30,000 lbs/in ² (2,110 kg/cm ²)

Film performance

Performance results were generated from testing 1/8"(3mm) thick clear glass.

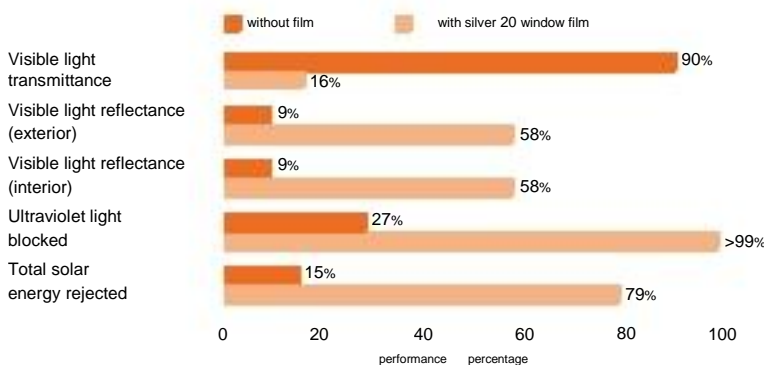

All performance results are based on the film installed on the inside surface of 1/8" (3mm), 1/4" (6mm), and 1/8"+1/8" (3mm+3mm) thick, clear glass

Notes

1. Saint-Gobain is a participating member of AIMCAL (the Association of Industrial Metallizers, Coaters and Laminators), IWFA, and EWFA. Performance results are calculated using NFRC methodology and LBNL Window 5.2 software, and are subject to variations within industry standards and only intended for estimating purposes.
2. These test data contain only results arrived at after employing specific test procedures and standards. The included data do not constitute a recommendation for, endorsement of, or certification of the product or material tested. These data are provided for informational purposes only and are not to be considered part of the basic representation or warranty, expressed or implied, including the implied warranties of merchantability or fitness for a particular purpose, that its products will conform to these test data. Saint-Gobain's limited warranty should be carefully reviewed prior to purchasing any Saint-Gobain product. Extrapolation of data from the sample or samples relation to the batch or lot from which data were obtained may not correlate and should be interpreted accordingly with caution. Saint-Gobain shall not be responsible for variations in quality, composition, appearance, performance, or other feature of similar subject matter produced by persons or under conditions over which Saint-Gobain has no control.
3. Performance results for summer solar heat gain reduction and glare reduction are calculated by comparing filmed glass to that of untreated glazing.

Distributed by:- Specialty Window Films : Unit 3D/89 Ellice Road Glenfield 0629 Auckland : P.O. Box 101167 NSMC
0745 : Tel (09) 441 0040 : Fax (09) 444 2788

www.solargard.co.nz